




A	REV
C	7251/08/122
C	MWC DRAWING NUMBER

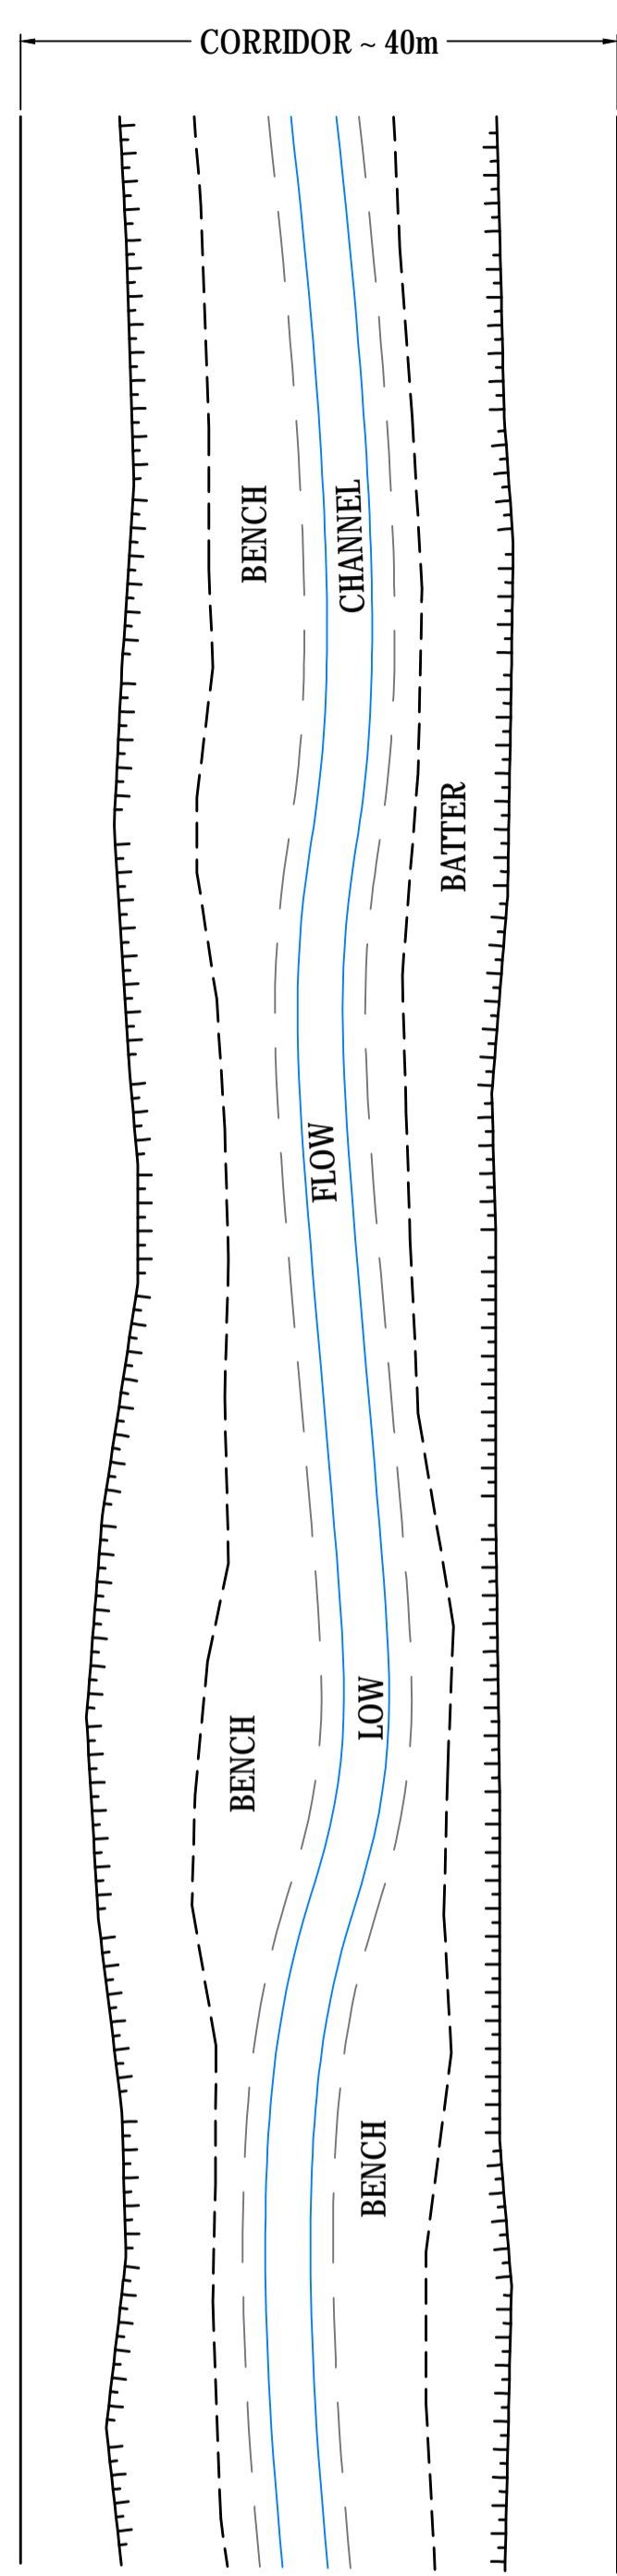


PLAN VIEW

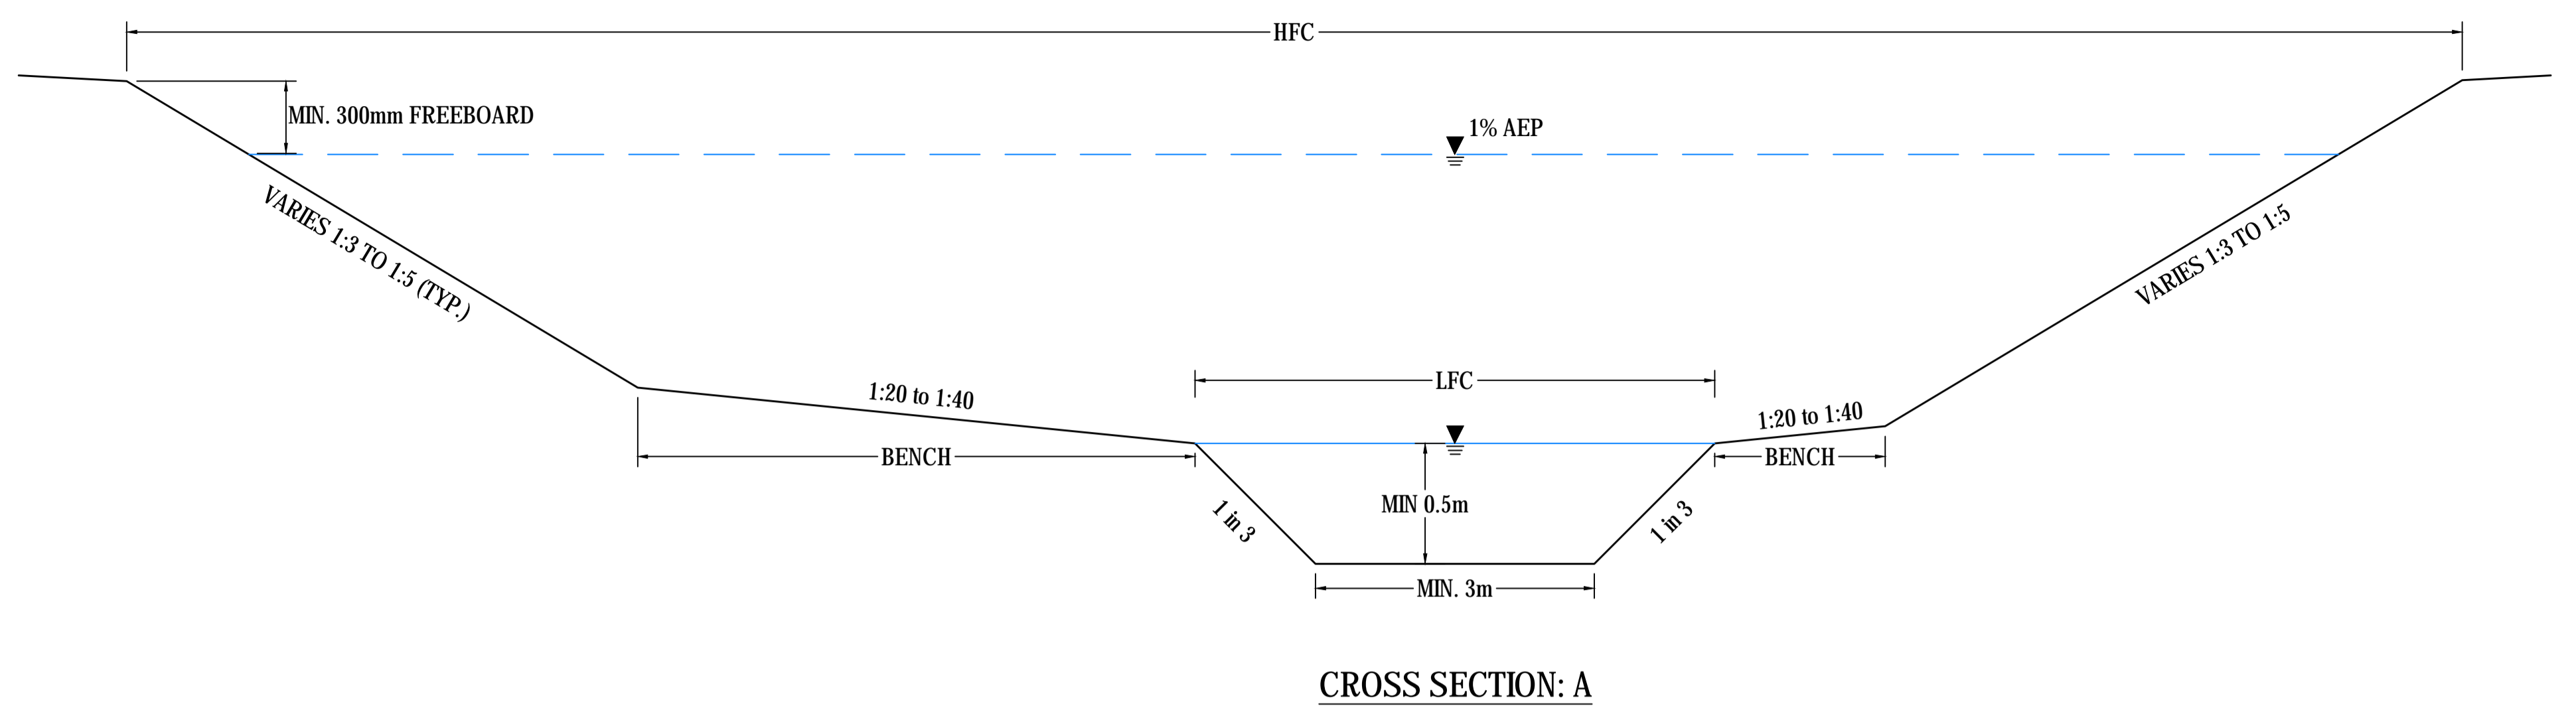

CROSS SECTION: A

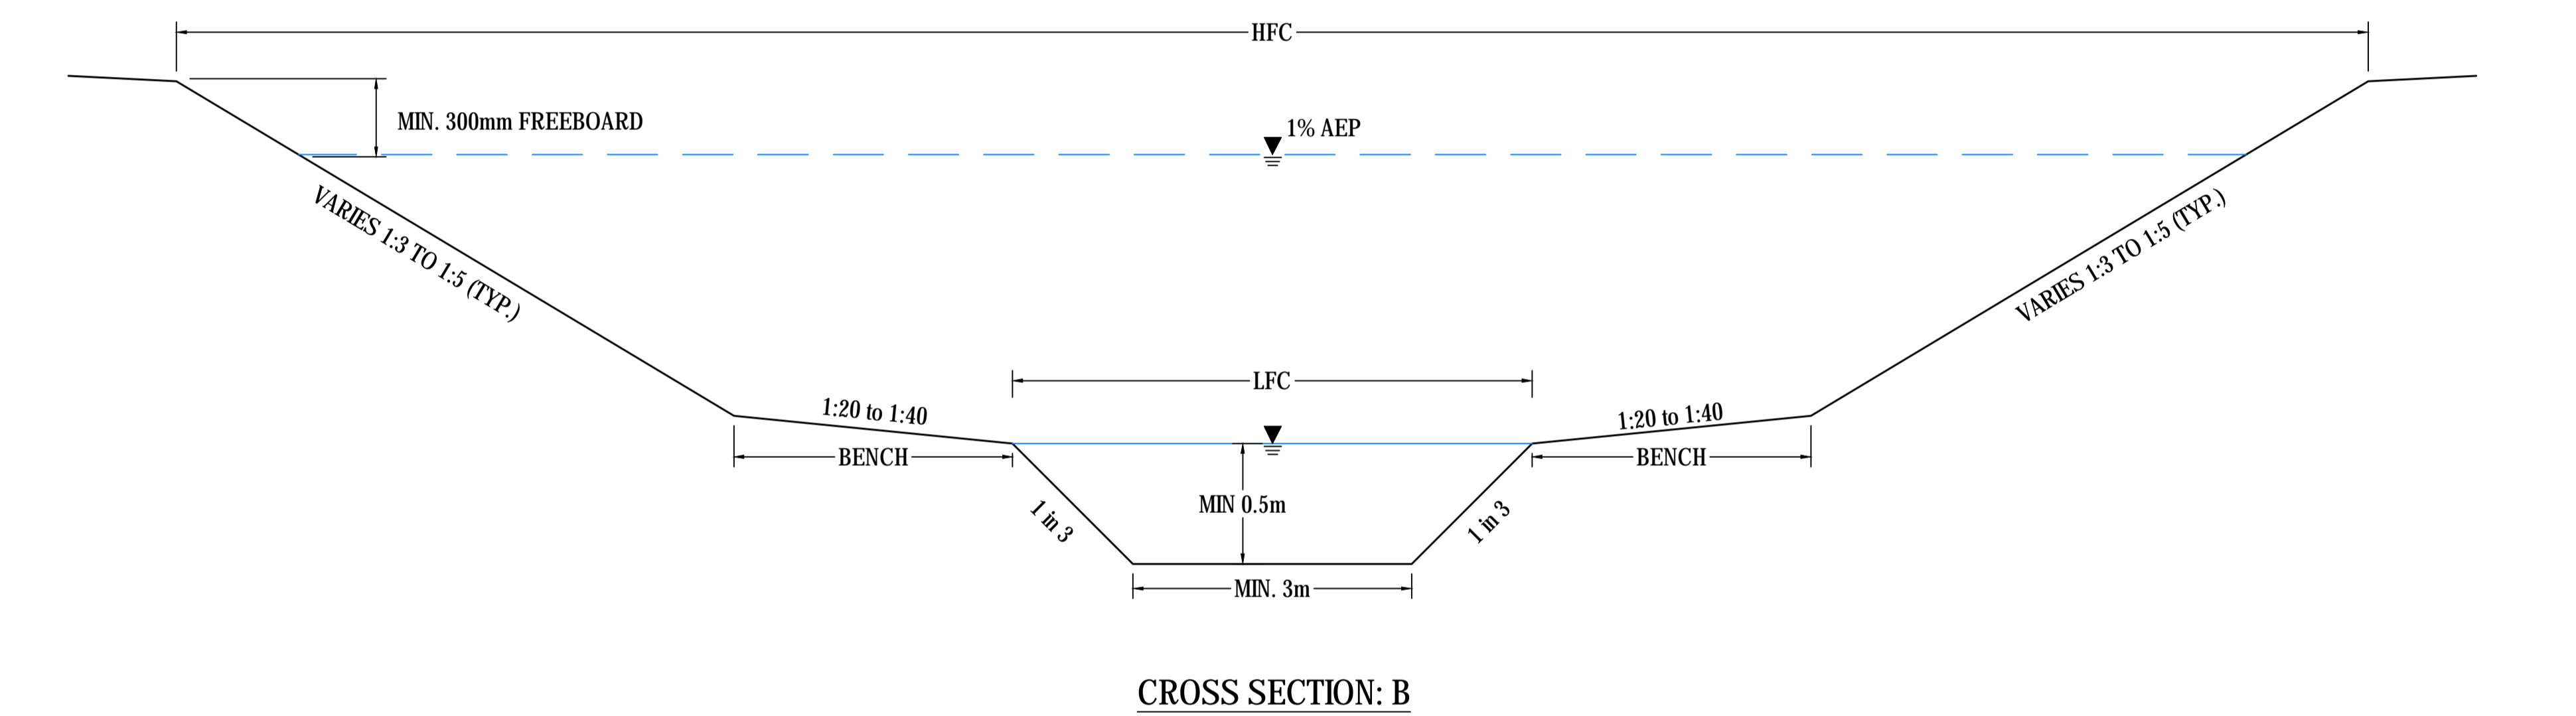

CROSS SECTION: B

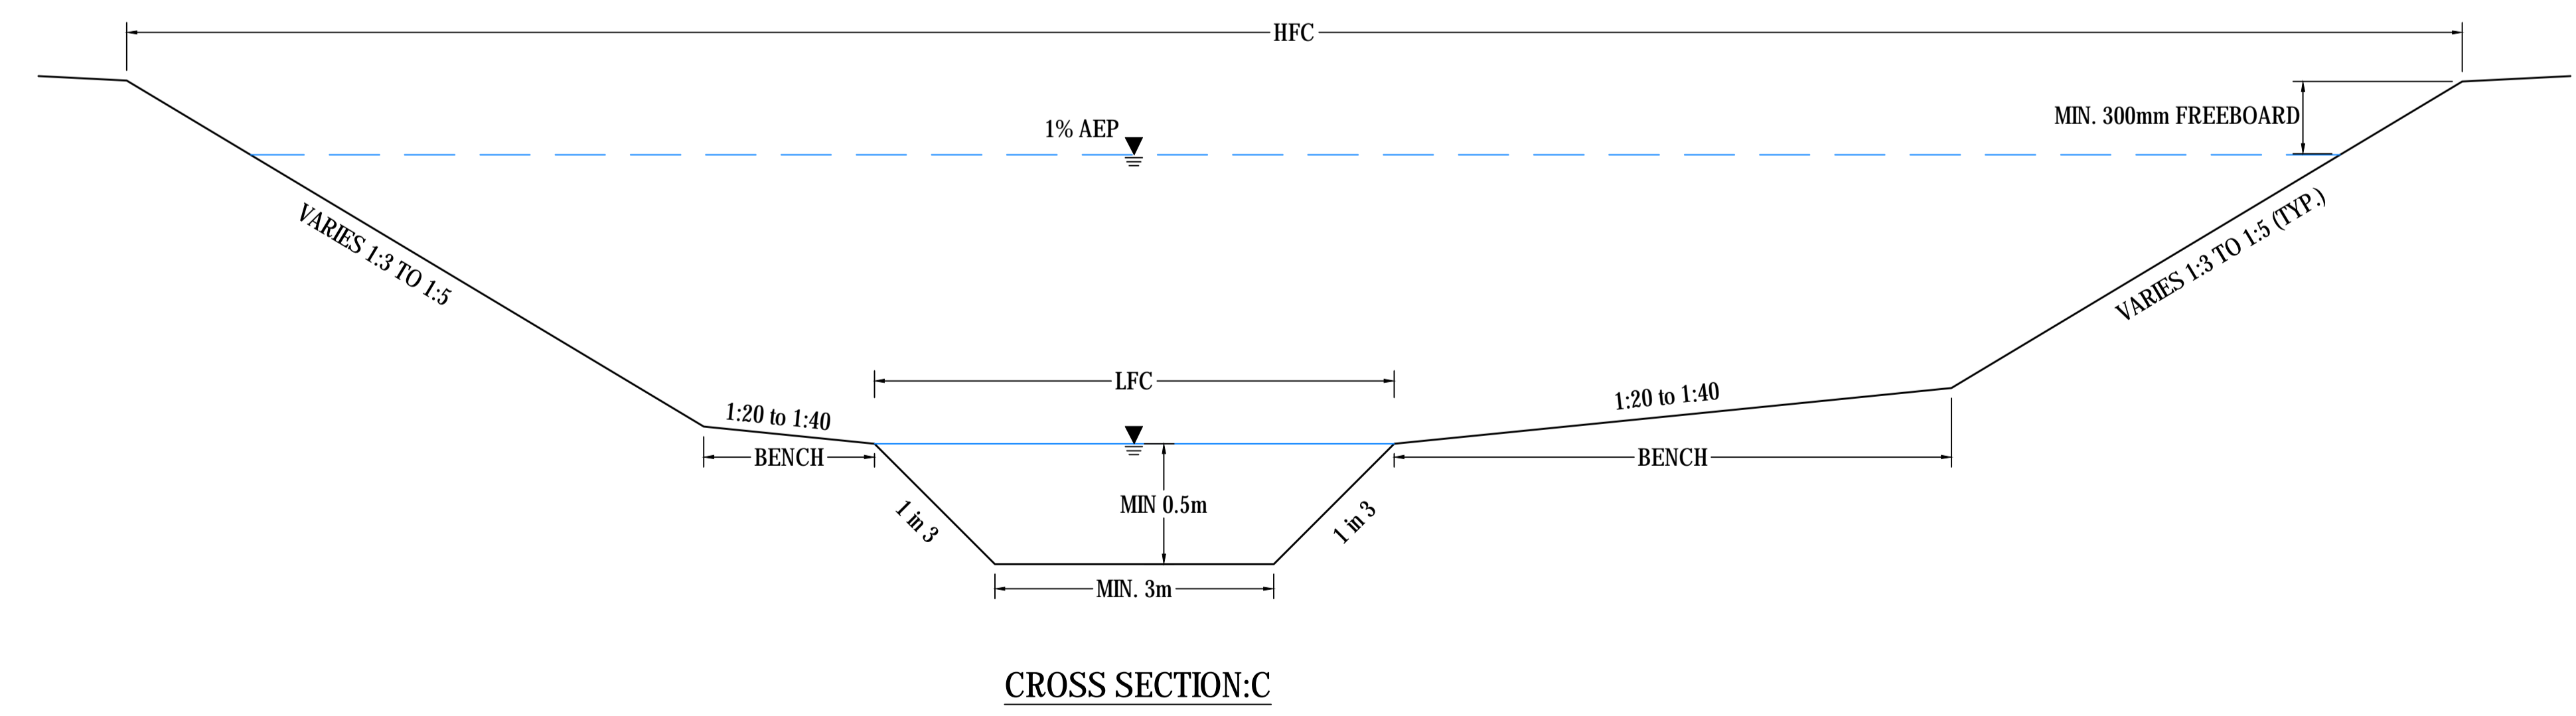

CROSS SECTION: C

- NOTE:
- MAXIMUM HIGH FLOW CHANNEL (HFC) STEEPNESS OF 1 in 3.
 - MINIMUM BASE WIDTH OF 3m (LOW FLOW CHANNEL (LFC)).
 - LFC TO BE SIZED FOR BETWEEN THE 4EY TO 1EY EVENT.
 - HFC TO CATER FOR 1% AEP EVENT.
 - 300mm FREEBOARD ABOVE 1% AEP TO BE PROVIDED WITHIN WATERWAY.
 - 600mm FREEBOARD FROM 1% AEP TO ADJACENT BUILDING FLOOR LEVEL.
 - HCF WITH BATTERS OF 1:3 TO BE DENSELY VEGETATED AND FENCED.

COPYRIGHT Copyright - This document is the property of Melbourne Water. Use or copying of the document in whole or in part without the written permission of Melbourne Water constitutes an infringement of copyright.								TITLE WATERWAY DRAWING TYPICAL WATERWAY - COMPOUND WATERWAY TYPE							
DRAFTER DRAFTING CHECK		DESIGNER ENGINEERING REVIEW		DESIGN MANAGER APPROVAL		PROJECT MANAGER APPROVAL		PROJECT DATUM SCALE NOT TO SCALE		Original Size A1		MELBOURNE WATER CORPORATION 7251/08/122 MWC DRAWING NUMBER		A REV	
A WATERWAY DESIGN MANUAL		ALLUVIUM		JB		21/08/19									
REV	DESCRIPTION	COMPANY	PROJECT OR WO NUMBER	DRAWN	ENG. CHECK	PR. MAN. APPD	DATE								